



**Chroma-Q®**  
BRILLIANT SOLUTIONS

**Specification Sheet - Version: 1.1**  
**Chroma-Q® Color Force II Plus 72**  
**Part No: CQ1641-3000**

## DESCRIPTION

Once again, Chroma-Q impresses with Color Force II Plus, the updated version of the renowned Color Force II™ professional luminaire.

The Color Force II Plus boasts enhanced brightness and a richer palette, while maintaining the same form factor and character as the market-leading original. The innovative optical system with individually controlled pixels provides smooth, beautiful and even coverage for any cyc or surface with no unsightly colour shadowing.

Designed for a variety of applications where powerful and precise lighting is essential, including cyc, flood and wall washing up to 12m.

Available in 1.8m / 6 ft, 1.2m / 4 ft, and 0.3m / 1 ft versions.

## FEATURES

- Featuring Chroma-Q's proven award winning technology
- Up-to 27,000 hot lumens will easily wash a 12m / 39 ft. cyc
- Extremely smooth, uniform output
- Homogenized RGBA colour mixing
- Pixel control to 76mm/3in increments
- High CRI of 92
- Theatrical grade dimming
- Rugged extruded aluminium body
- Built-in power supply
- Chroma-Q calibration means: superior fixture-to-fixture consistency
- Works great in any theatre, TV, concert touring, exhibitions or corporate event
- Optional internal LumenRadio
- Touchscreen user interface

## ORDERING INFORMATION

CQ1641-3000:	Chroma-Q Color Force II Plus 72, black
CQ1641-3100:	Chroma-Q Color Force II Plus 72, white
CQ1641-3500:	Chroma-Q Color Force II Plus 72, w/LumenRadio, black
CQ1641-3600:	Chroma-Q Color Force II Plus 72, w/LumenRadio, white

## ACCESSORIES

CHCFBL72:	Chroma-Q border lens for Color Force II Plus 72
CHCFCL72:	Chroma-Q cyc lens for Color Force II Plus 72
CHCFTL72:	Chroma-Q clear lens Color Force II Plus 72
CQ641-9103:	Chroma-Q Hang Force kit Color Force II Plus 72, black
CQ641-9104:	Chroma-Q Hang Force kit Color Force II Plus 72, white
CQ641-9016:	Chroma-Q Light Guard Color Force II Plus 72, black
CQ641-9017:	Chroma-Q Light Guard Color Force II Plus 72, white

## OVERALL SPECIFICATIONS

Net Dimensions (without fixings):	Length: 1,759mm / 69.25" Width: 165mm / 6.5" Height: 191mm / 7.5"
Net Weight:	24kg / 53lb
Shipping Dimensions:	Length: 1,855mm / 73" Width: 305mm / 12" Height: 320mm / 12.5"
Shipping Weight:	27kg / 59lbs
Power Supply:	Built-in
Power Input Rating:	100-240V AC 50-60Hz 800VA
Power Factor:	0.96 @ 120V AC, 0.99 @ 240V AC
Power Consumption:	800W @ 120V AC, 800W @ 240V AC
Inrush Current:	80A @ 120V AC
Idle Power Consumption:	29W @ 120V AC, 32W @ 240V AC
Typical Power & Current:	Measurements done with all LEDs at maximum intensity. Measurements made at nominal voltage. Allow for a deviation of +/- 10%
Power Connectors In/Out:	Neutrik powerCON TRUE1
Data Connectors In/Out:	Neutrik XLR 5-pin
Max Fixtures in Series:	2 x fixtures @110V, 4 x Fixtures @220V
Control Protocol:	ANSI E1.11 USITT DMX 512-A
Cooling System:	Forced
Operating Temperature:	0°C to 40°C
Construction:	Anodised aluminium extrusion
Colour:	Black
Built-In Hardware:	Quick release lever for tilt adjustment
IP Rating:	IP20
Control Modes:	Strobe Options, RGBA, RGB, HSI, x1, x2, x3, x4, x6, x8, x12, x24, Look Select, Master, Odd / Even, Skip2, Skip3, Skip6
Dimming Curve:	Theatrical
Variable Effects Engine:	Strobe, Strobe on Top, Strobe Random
Hot Lumen Output (Combined):	27,000 lm
Optics:	Fully homogenised lenses
Beam Angle:	26° (approx.)
Beam Distribution:	Asymmetrical direct illumination
CCT:	Adjustable 1,000 - 10,000K
Colour Gamut:	Performance enhanced
CRI:	92
Lamp Life:	L70 at 50,000 hours
Approvals:	CISPR 22: 2006/EN55022: 2006 & CISPR 24: 1997/EN55024: 1998, ICES-003: 2004 & FCC Part 15 Subpart B: 2007, CSA C22. No. 166-M1983:R2008 UL 1573: 2003; UL 8750




**Chroma-Q®**  
BRILLIANT SOLUTIONS


**Specification Sheet - Version: 1.1**  
**Chroma-Q® Color Force II Plus 72**  
**Part No: CQ1641-3000**

**PHOTOMETRICS**

Fixture model Color Force II Plus 72	Throw Distance		Field Spread		Beam Spread		Full On	
	m	ft	m	ft	m	ft	Lux	Footcandle
Field: 54°	1.00 m	3.3 ft	1.0 m	3.3 ft	0.5 m	1.5 ft	92600 lx	8603 fc
Beam: 26°	1.53 m	5.0 ft	1.6 m	5.1 ft	0.7 m	2.3 ft	39557 lx	3675 fc
Magnification (mf): 0.46 x	3.05 m	10.0 ft	3.1 m	10.2 ft	1.4 m	4.6 ft	9954 lx	925 fc
Candelas: 92600 Cd	3.95 m	13.0 ft	4.0 m	13.2 ft	1.8 m	6.0 ft	5935 lx	551 fc
Lumens: 27000 lm	4.56 m	15.0 ft	4.6 m	15.2 ft	2.1 m	6.9 ft	4453 lx	414 fc
Watts: 641 w	6.10 m	20.0 ft	6.2 m	20.4 ft	2.8 m	9.2 ft	2489 lx	231 fc
Lumen/w: 144.5 lm/w	6.85 m	22.5 ft	7.0 m	22.9 ft	3.2 m	10.4 ft	1973 lx	183 fc
CRI Ra: 92	7.63 m	25.0 ft	7.8 m	25.5 ft	3.5 m	11.6 ft	1591 lx	148 fc
TM-30 Rf / Rg: 88 / 105	9.15 m	30.0 ft	9.3 m	30.6 ft	4.2 m	13.9 ft	1106 lx	103 fc
Duv: -0.0012	10.07 m	33.0 ft	10.3 m	33.7 ft	4.6 m	15.3 ft	913 lx	85 fc

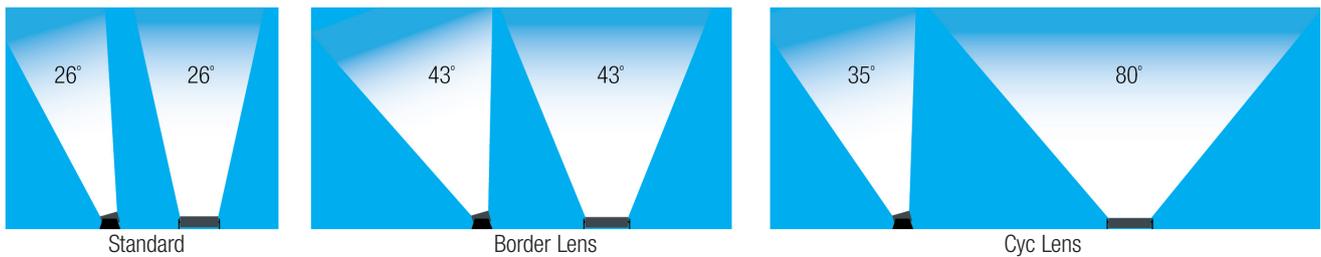

**DIMENSIONS**

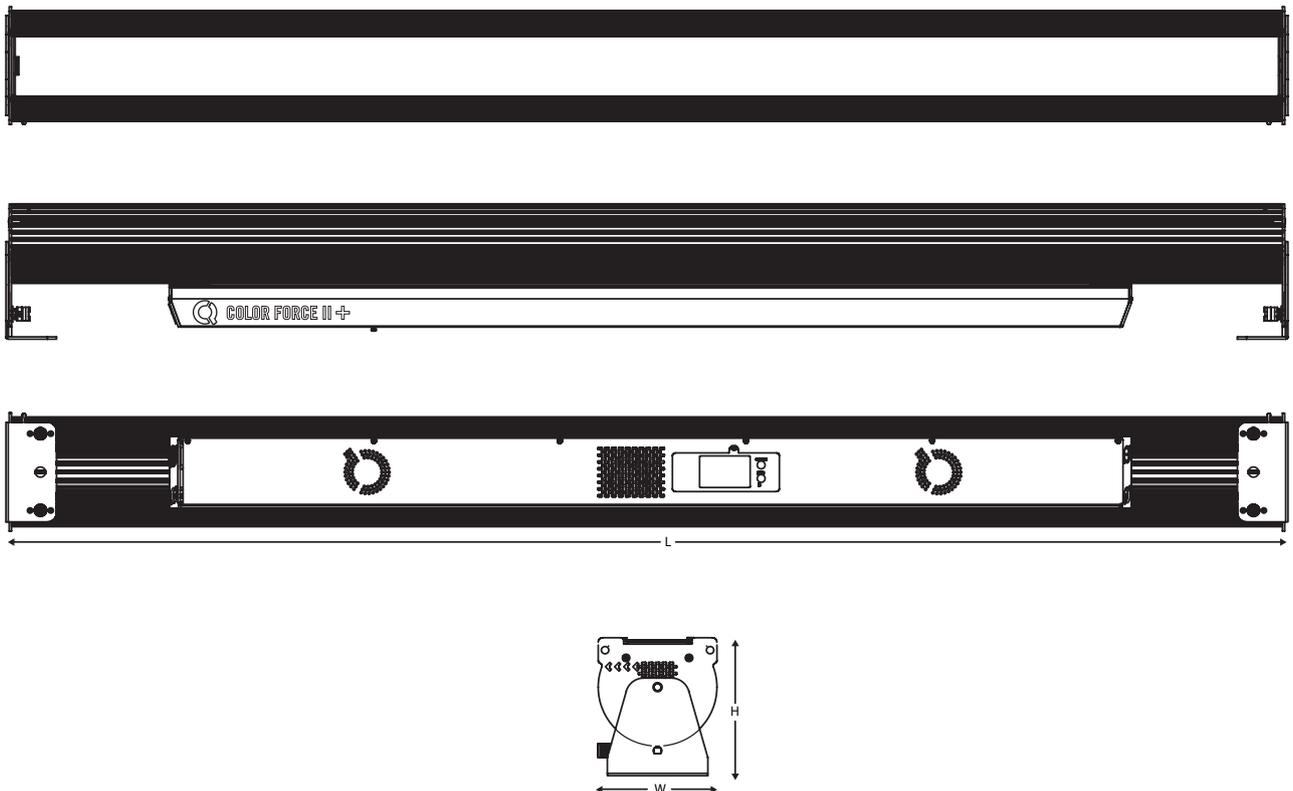

[www.chroma-q.com](http://www.chroma-q.com)

\*Chroma-Q and all associated product names are recognised trademarks, for more information visit [www.chroma-q.com/trademarks](http://www.chroma-q.com/trademarks). The rights and ownership of all trademarks are recognised. Whilst every effort has been made to ensure that the information is correct, Chroma-Q accepts no liability for errors or omissions. Technical specifications and data are provided for guidance only. Because we constantly aim to improve our products, we reserve the right to amend or alter at any time and without prior notice, the specifications of any product. E&OE.\*